

EML electro-magnetic lock




Clear anodized finish

Energy specifications:

Fail-safe and unmonitored
Single magnet for single swing door:
500mA at 12VDC, 250mA at 24VDC
Double magnet for double swing door:
1000mA at 12VDC, 500mA at 24VDC

Holding strength:

Up to 544 kg (1200 lb)

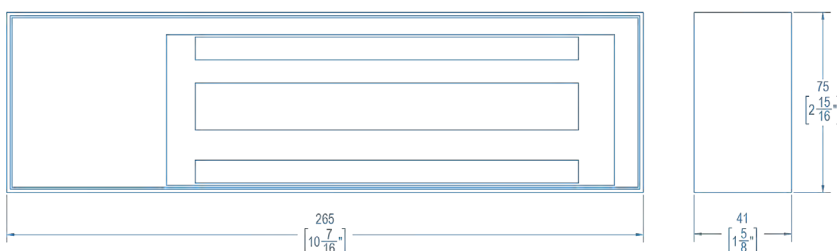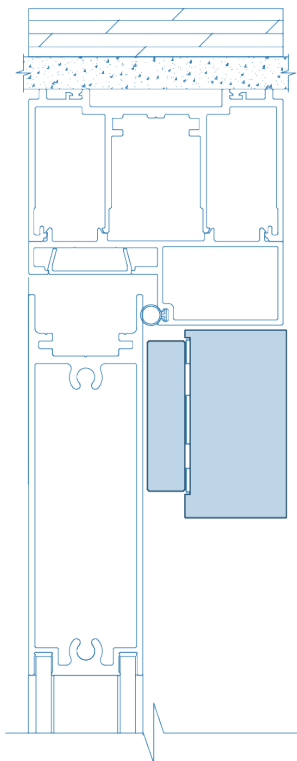

Door options	Handle options		
	Pull handle	Cylindrical lockset	Mortise lockset
FG10/FG12 frameless glass door			
S12 low profile glass door	✓	✓	✓
D52 acoustic asymmetric door	✓	✓	✓
D56 acoustic door	✓	✓	✓