

ES electric strike

General specifications:

Non-handed
Horizontal adjustment of up to 6 mm (1/4")
Plug-in wire connectors and trim plate (included)

Adjustability:

Vertical adjustment up to 45mm



Energy specifications:

Fail safe or fail secure (field-selectable)
375mA at 12VDC
(field-selectable) 12/24VDC or 12-24VAC

Holding strength:

Up to 680 kg (1500 lb)

Stainless steel
finish

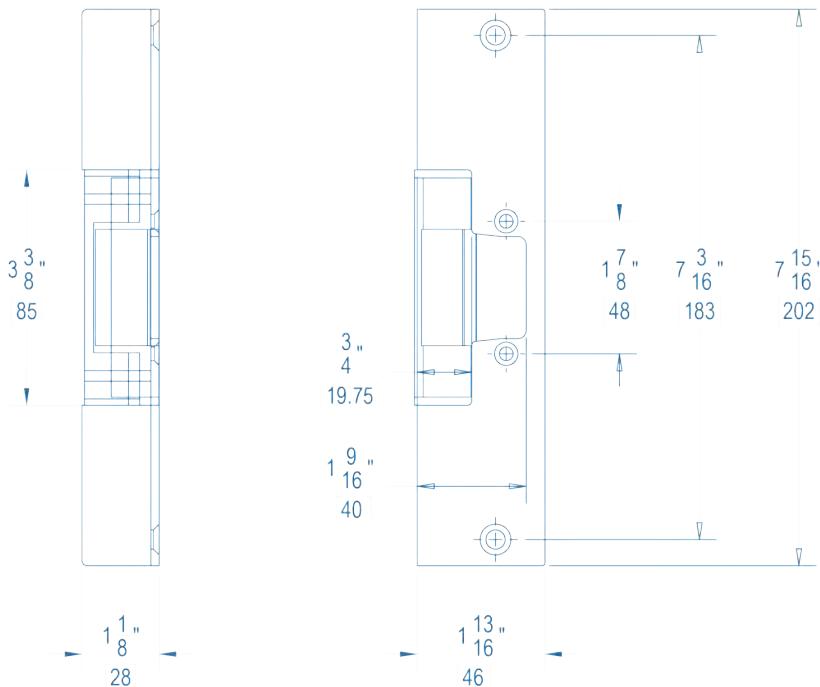

Door options	Handle options		
	Pull handle	Cylindrical lockset	Mortise lockset
FG10/FG12 frameless glass door		✓	✓
S12 low profile glass door		✓	✓
D52 acoustic asymmetric door		✓	✓
D56 acoustic door		✓	✓