



moodwall

CATALOGUE

2026



TABLE OF CONTENTS

SYSTEMS	2	HARDWARE	14
moodwall P1	3	MAKE3 hinge	15
moodwall P3	5	HHFG hydraulic hinge	16
moodwall P4	7	BH45 hinge	17
		HH45 hydraulic hinge	18
DOORS	9	LEAF pivot hydraulic hinge	19
FG10/FG12 frameless glass door	10	INTEC sliding track assembly	20
S12 low profile glass door	11	KERE-NL pull handle	22
D52 acoustic asymmetric door	12	KERE locking pull handle	23
D56 acoustic door	13	SEJO cylindrical lockset	24
		MARO cylindrical lockset	25
		TERO cylindrical lockset	26
		SERE mortise lockset	27
		RESE mortise lockset	28
		REVEL mortise lockset	29
		DS1 surface-mounted drop seal	30
		DS2 mortise drop seal	31
		HDC surface-mounted door closer	32
		FS floor stop with rubber buffer	33
		ES electric strike	34
		EML electromagnetic lock	35

moodwall systems

3 UNIQUE SYSTEMS

the innovative and functional design of moodwall architectural walls can transform any workspace, enhancing both the environment and the people within it. The moodwall product line features three distinct systems: P1, P3, and P4, each offering unique solutions for contemporary workspaces.

SOUND TRANSMISSION CLASS (STC)

moodwall architectural walls have been rigorously tested in accordance with ASTM E90-09, achieving a range of STC ratings that effectively meet the acoustic demands of modern workspaces.

P1

Low profile single-glazed wall system

P3

Standard profile single-glazed wall system

P4

Wide profile single- or double-glazed system, with the option to replace glass panels with solid melamine panels

SYSTEM	DESCRIPTION	STC
P1/P3	Single 10 mm (3/8") tempered glass	27
P1/P3	Single 10 mm (3/8") laminated glass	32
P1/P3	Single 12 mm (1/2") tempered glass	34
P1/P3	Single 12 mm (1/2") laminated glass	35
P4	Double 10 mm (3/8") tempered glass	38
P4	Double 10 mm (3/8") 1 tempered glass + 1 laminated glass	45
P4	Double 16 mm (5/8") melamine with 50 mm (2") insulation	41


moodwall P1

SLEEK & MINIMALIST

moodwall P1 is designed to elevate the modern workplace by maximizing clarity and transparency. A sleek and minimalist system crafted for the people for today's workplace.



CEILING CHANNEL

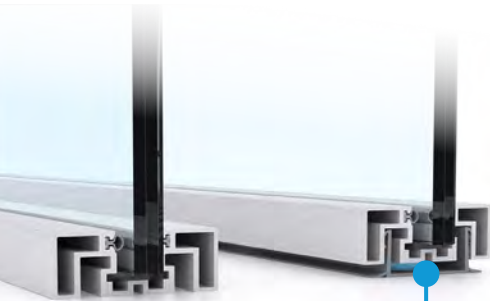

FLOOR CHANNEL

adjustment gasket



P1

moodwall P1

Ceiling channel:

60 mm (2-3/8") high x 55 mm (2-3/16") wide

Floor channel without adjustment gasket:

25 mm (1") high x 57 mm (2-1/4") wide

Floor channel with adjustment gasket:

32 mm (1-1/4") high x 57 mm (2-1/4") wide (compressed)

Allowable vertical adjustment:

± 6 mm (1/4")

Glass options and STC ratings:


10 mm (3/8") tempered (STC 27)

10 mm (3/8") laminated (STC 32)

12 mm (1/2") tempered (STC 34)

12 mm (1/2") laminated (STC 35)

Aluminum frame finish options:



Clear anodized
finish



Black powder
coat finish

moodwall P3

FLEXIBILITY & PERFORMANCE

moodwall P3 is our most versatile architectural wall system yet. Designed for modularity, it seamlessly integrates with moodwall P4 while delivering exceptional acoustic performance and privacy.



P3

moodwall P3

Ceiling and floor channels:

60 mm (2-3/8") high x 55 mm (2-3/16") wide

Allowable vertical adjustment:

± 20 mm (3/4")



Glass options and STC ratings:

10 mm (3/8") tempered (STC 27)

10 mm (3/8") laminated (STC 32)

12 mm (1/2") tempered (STC 34)


12 mm (1/2") laminated (STC 35)

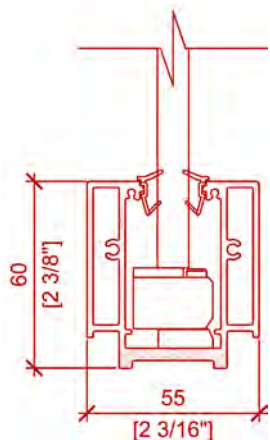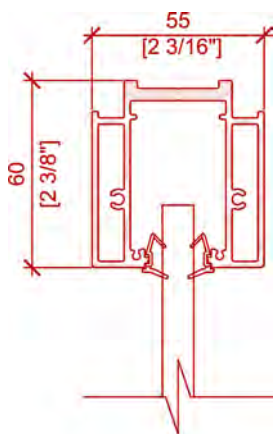

Aluminum frame finish options:



Clear anodized
finish



Black powder
coat finish

moodwall P4

SOUND & VISION

moodwall P4 strikes a balance between acoustics and transparency with single or double glazing. Glass and structural aluminum come together to create an exceptional architectural wall system. A wall system that provides remarkable clarity and acoustics for the modern office.



P4

moodwall P4

Ceiling and floor channels:

60 mm (2-3/8") high by 100 mm (3-15/16") wide

Allowable vertical adjustment:

± 25 mm (1")

Insert options and STC ratings:

Double 10 mm (3/8") - tempered glass (STC 38)

Double 10 mm (3/8") -

tempered glass + laminated glass (STC 45)

Double 16 mm (5/8") melamine


with 50 mm (2") insulation in between (STC 41)

Melamine finish options and specifications:


Material: MDF core with thermally fused melamine saturated paper finish

Dimensions: 1524 mm x 2743 mm (5' x 9') per sheet, custom cut to size

Fire resistance: Class III or C (ASTM E-84)



555 NovaWhite
Dolomite finish




631 Classic Black
Dolomite finish

Other finish options available on demand





Aluminum frame finish options:



Clear anodized
finish



Black powder coat
finish

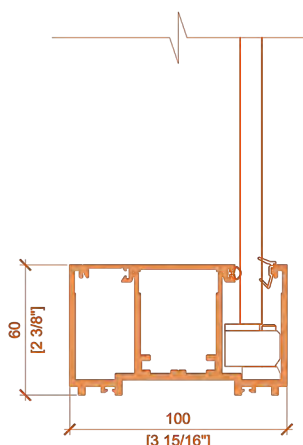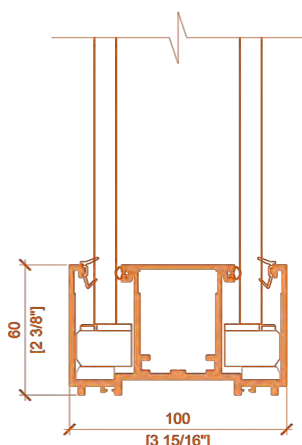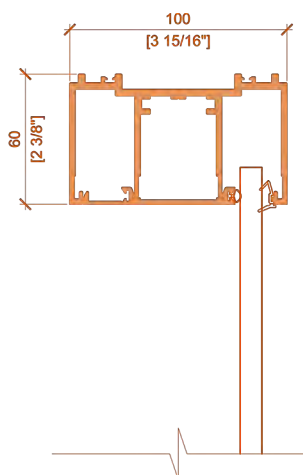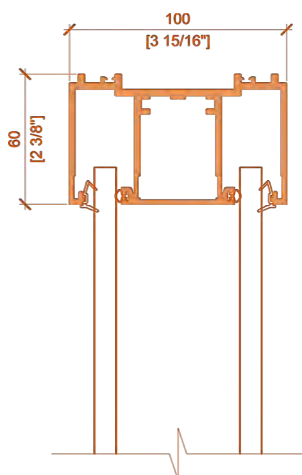

DOORS




CUSTOMIZE YOUR MOODWALL

from a frameless glass door that provides a simple yet clean aesthetic, to an aluminum-framed door for a more modular look, mix and match from a selection of doors to complete your moodwall system.


FLEXIBLE DESIGN & FUNCTIONALITY

whether you need a single sliding door for an office or a pair of swing doors for a large conference room, moodwall can accommodate the needs of your workplace with a wide variety of door and hardware combinations.

SWING DOOR

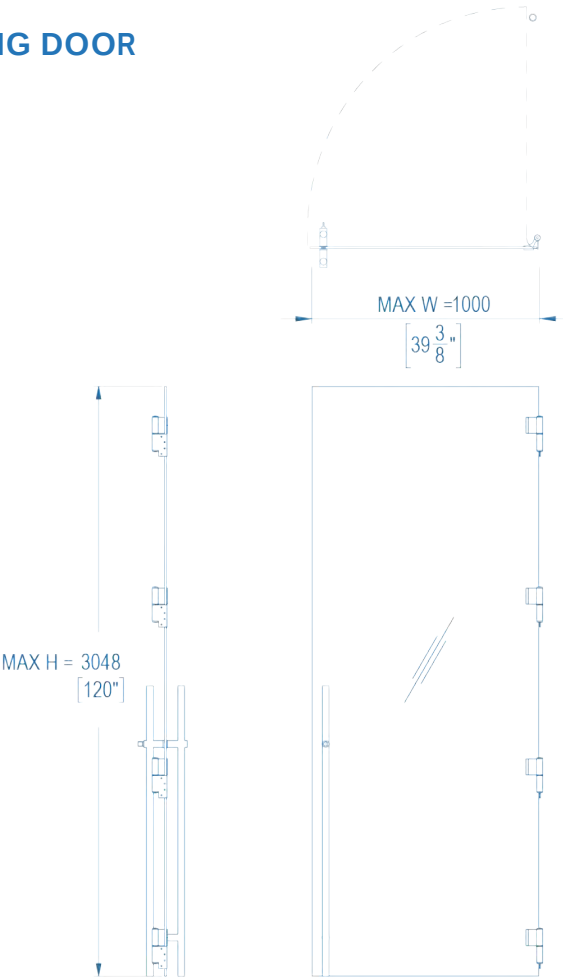

SLIDING DOOR

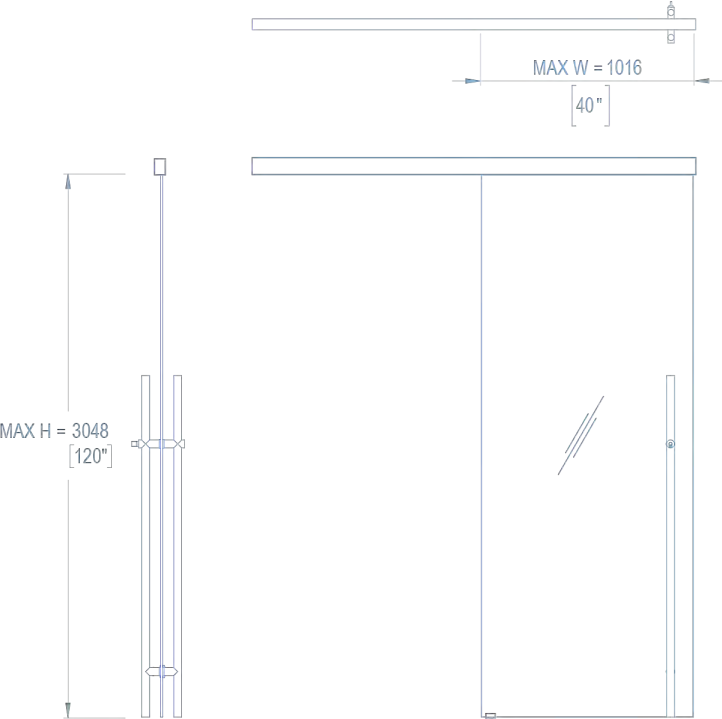

FG10 FG12

Frameless glass door FG10/FG12

Glass options:
10 mm (3/8") tempered glass (FG10)
12 mm (1/2") tempered glass (FG12)

Hinge/track options	Handle options			
	MAKE3 butt hinge	HHFG hydraulic hinge	Sliding track assembly	LEAF hydraulic pivot hinge
KERE pull handle		✓	✓	✓
SEJO cylindrical lockset	✓	✓		
SERE mortise lockset	✓	✓		

Other hardware options:
Electric strike (swing door with lockset only)
Surface-mounted drop seal (swing door only)
Floor stop (swing door only)

Low profile glass door S12

Glass options:

12 mm (1/2") tempered glass only


Aluminum frame finish options:



Clear anodized finish






Black powder coat finish

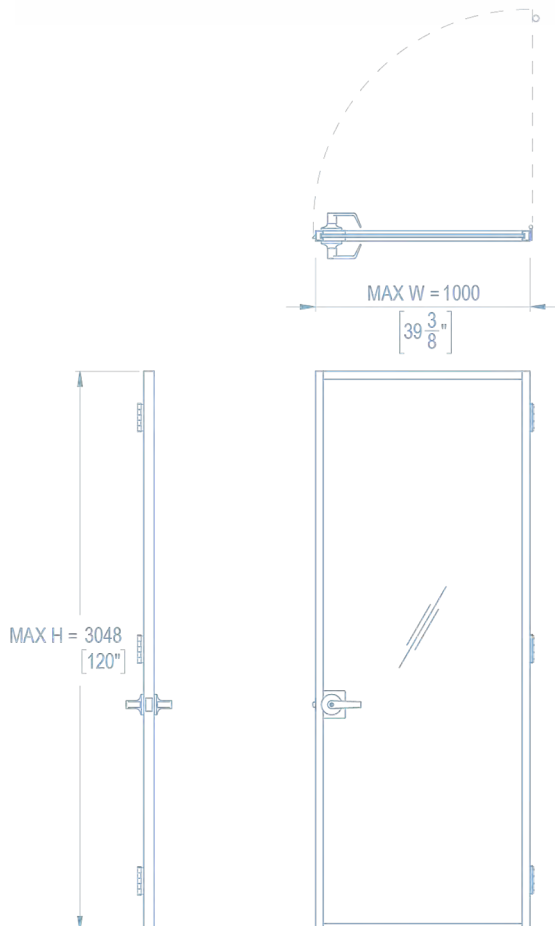

Handle options	Hinge/track options		
	BH45 butt hinge	HH45 hydraulic hinge	Sliding track assembly
KERE pull handle		✓	✓
MARO cylindrical lockset	✓	✓	
RESE mortise lockset	✓	✓	

Other hardware options:

Electric strike (swing door with lockset only)
 Surface-mounted door closer (swing door only)
 Mortise drop seal (swing door only)
 Floor stop (swing door only)

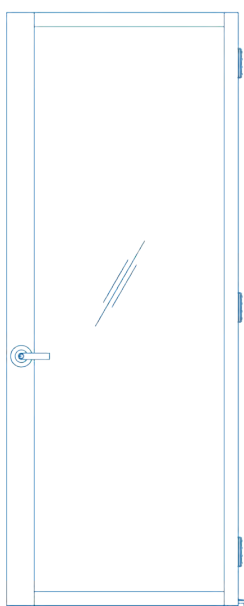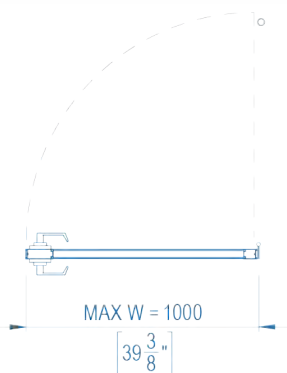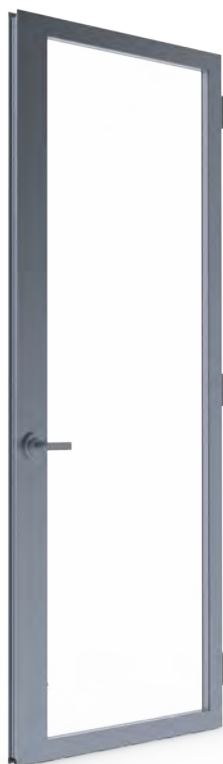


D52

Acoustic asymmetric door D52


Insert options:

Double 6 mm (1/4") tempered glass
Double 16 mm (5/8") melamine

Melamine insert finish options:



555 NovaWhite
Dolomite finish




631 Classic Black
Dolomite finish

Aluminum frame finish options:



Clear anodized
finish







Black powder
coat finish

Hinge/track options Handle options	Hinge/track options		
	BH45 butt hinge	HH45 hydraulic hinge	Sliding track assembly
KERE pull handle		✓	✓
TERO cylindrical lockset	✓	✓	
REVEL mortise lockset	✓	✓	

Other hardware options:

Electric strike (swing door with lockset only)
Surface-mounted door closer (swing door only)
Mortise drop seal (swing door only)
Floor stop (swing door only)

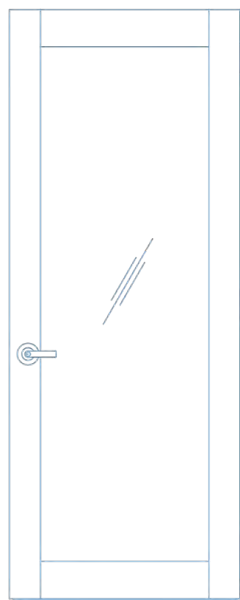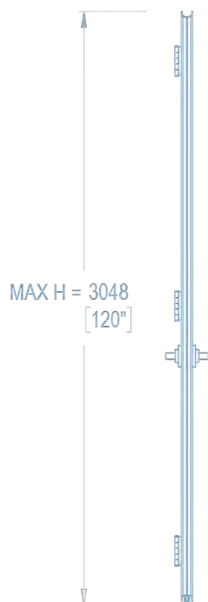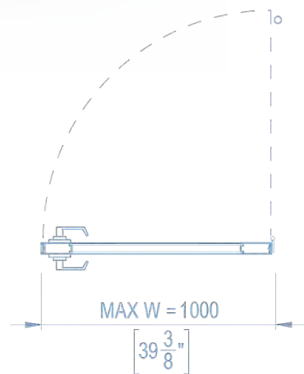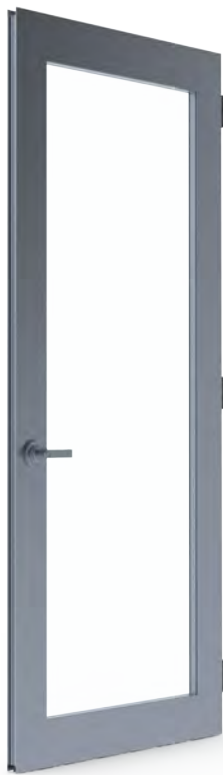


D56

Acoustic door


Insert options:

Double 6 mm (1/4") tempered glass
Double 16 mm (5/8") melamine

Melamine insert finish options:



555 NovaWhite
Dolomite finish




631 Classic Black
Dolomite finish

Aluminum frame finish options:



Clear anodized
finish



Black powder
coat finish

Hinge/track options	Handle options		
	BH45 butt hinge	HH45 hydraulic hinge	Sliding track assembly
KERE pull handle		✓	✓
TERO cylindrical lockset	✓	✓	
REVEL mortise lockset	✓	✓	


Other hardware options:

Electric strike (swing door with lockset only)
Surface-mounted door closer (swing door only)
Mortise drop seal (swing door only)
Floor stop (swing door only)

HARDWARE

ENHANCE YOUR MOODWALL WITH QUALITY & STYLE

upgrade the security and aesthetics of your moodwall system with quality door hardware.
Select from a range of hinges, handles, and complementary hardware.

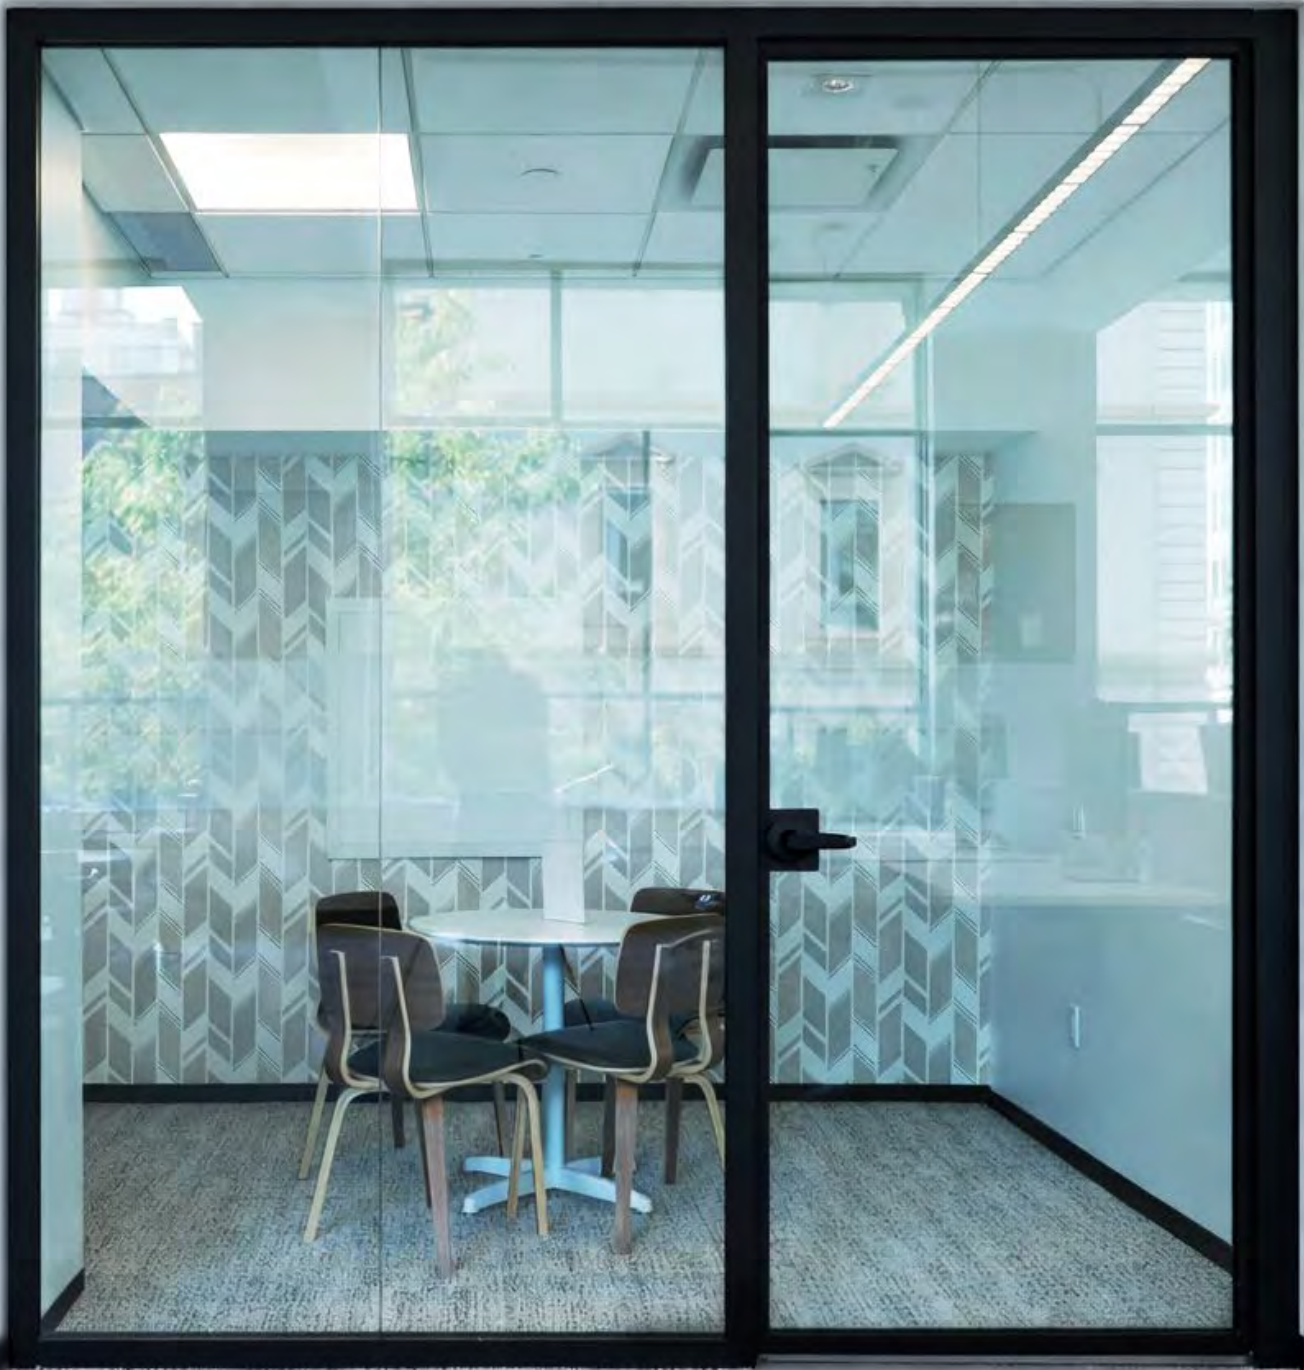



Clear
anodized



Black finish

MAKE3


MAKE3 hinge

Load capacity:

Up to 90 kg (200 lb) with 3 hinges

Degree of opening:

180°

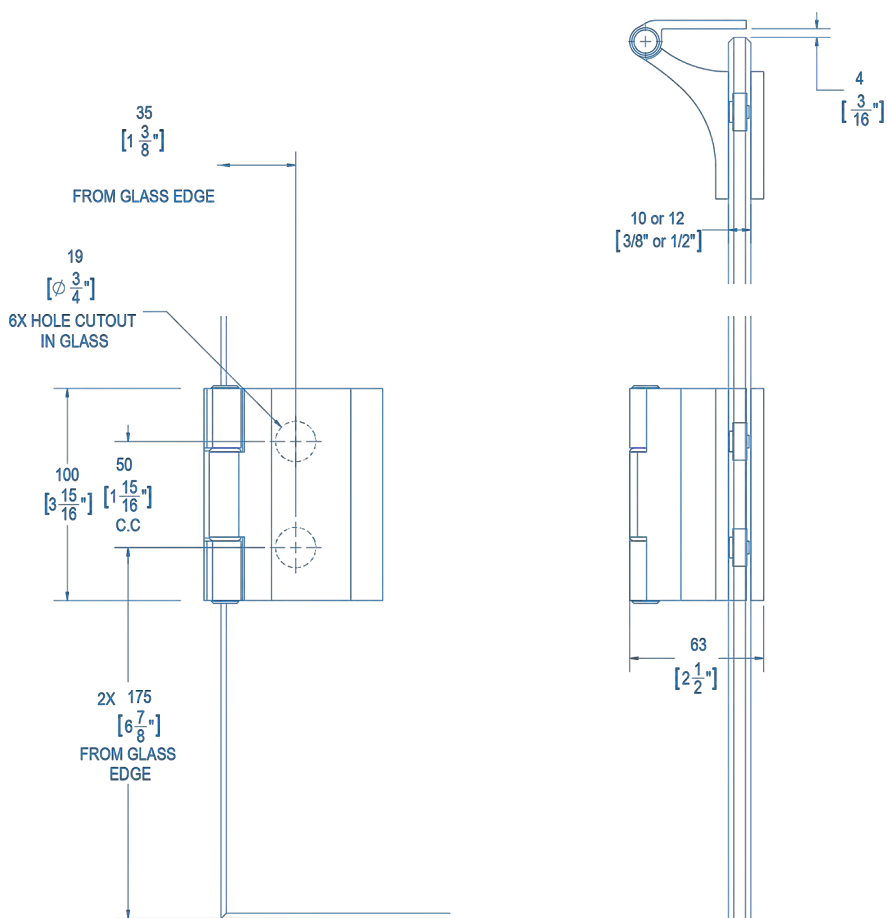

Door options	Handle options		
	Pull handle	Cylindrical lockset	Mortise lockset
FG10/FG12 frameless glass door		✓	✓
S12 low profile glass door			
D52 acoustic asymmetric door			
D56 acoustic door			

Complementary hardware:

Electric strike (with lockset only)
Surface-mounted drop seal
Floor stop

Clear
anodized

Black finish

HHFG

HHFG hydraulic hinge

Load capacity:

Up to 100 kg (220 lb) with 3 hinges (HHFG)

Up to 150 kg (330 lb) with 4 hinges (HHFG)




Degree of opening:

90°

Integrated functions:

Hold-open at 90°

Soft-close

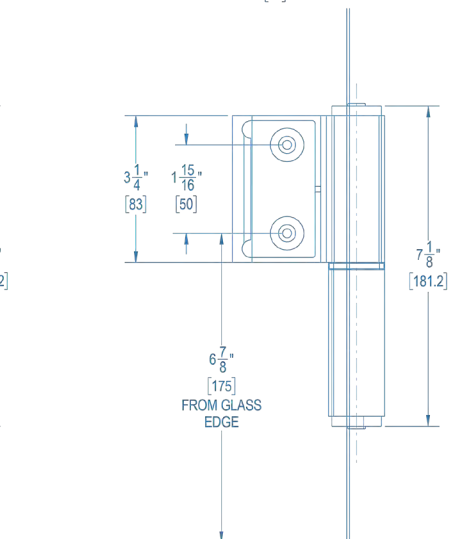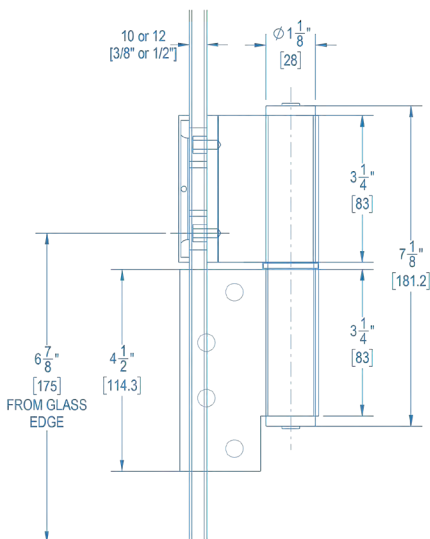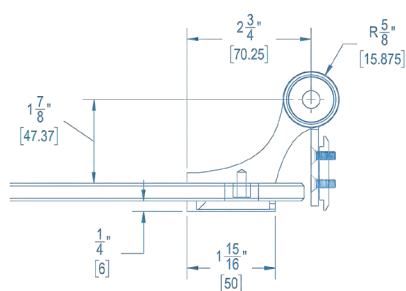

Door options	Handle options		
	Pull handle	Cylindrical lockset	Mortise lockset
FG10/FG12 frameless glass door	✓	✓	✓
S12 low profile glass door			
D52 acoustic asymmetric door			
D56 acoustic door			

Complementary hardware:

Electric strike (with lockset only)

Surface-mounted drop seal

Floor stop



BH45 hinge

Load capacity:

Up to 68 kg (150 lb) with 3 hinges

Degree of opening:

180°

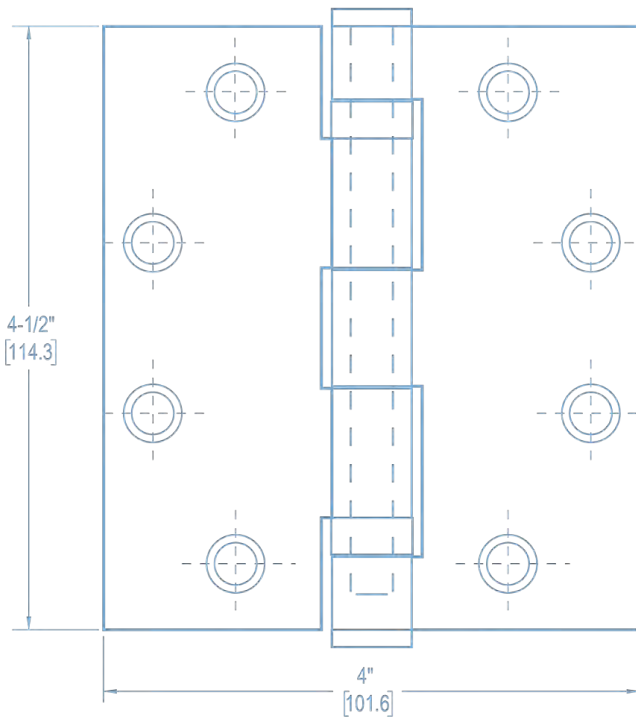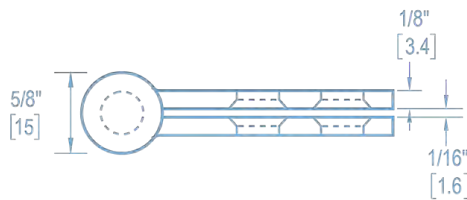

Door options	Handle options		
	Pull handle	Cylindrical lockset	Mortise lockset
FG10/FG12 frameless glass door			
S12 low profile glass door		✓	✓
D52 acoustic asymmetric door		✓	✓
D56 acoustic door		✓	✓

Complementary hardware:

Electric strike (with lockset only)

Mortise drop seal

Floor stop



Clear
anodized



Black finish

HH45

HH45 hydraulic hinge

Load capacity:




Up to 90 kg (200 lb) with 4 hinges
(2 hydraulic hinges & 2 dummy hinges)

Degree of opening:

160°

Integrated functions:


Hold-open at 90° or 120°
Soft-close

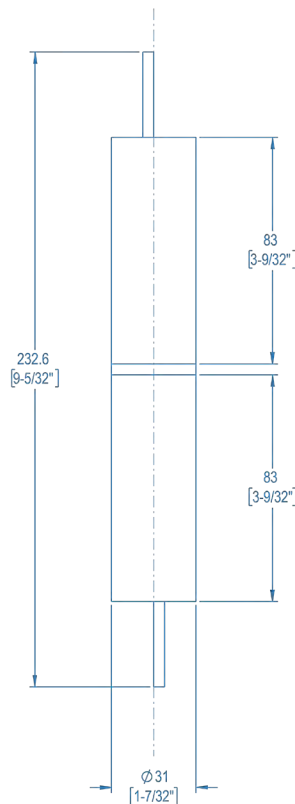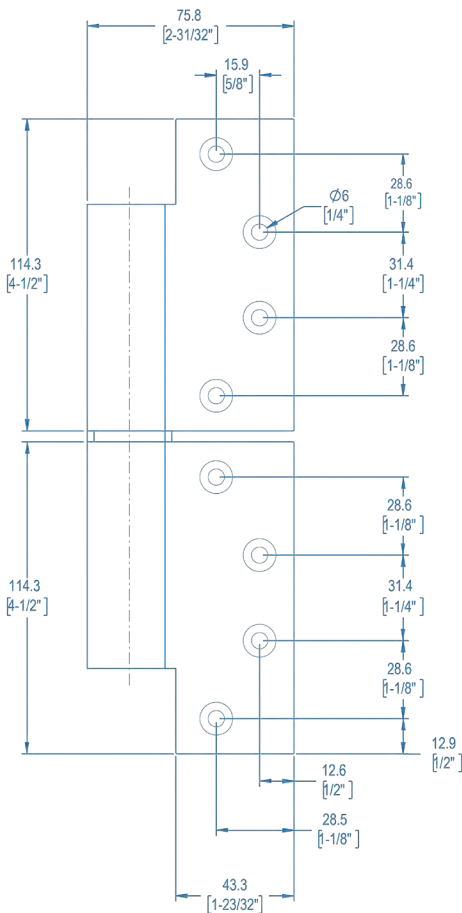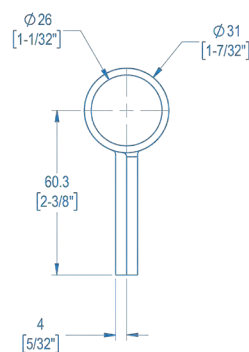


Door options	Handle options		
	Pull handle	Cylindrical lockset	Mortise lockset
FG10/FG12 frameless glass door			
S12 low profile glass door	✓	✓	✓
D52 acoustic asymmetric door	✓	✓	✓
D56 acoustic door	✓	✓	✓

Complementary hardware:


Electric strike (with lockset only)
Mortise drop seal
Floor stop

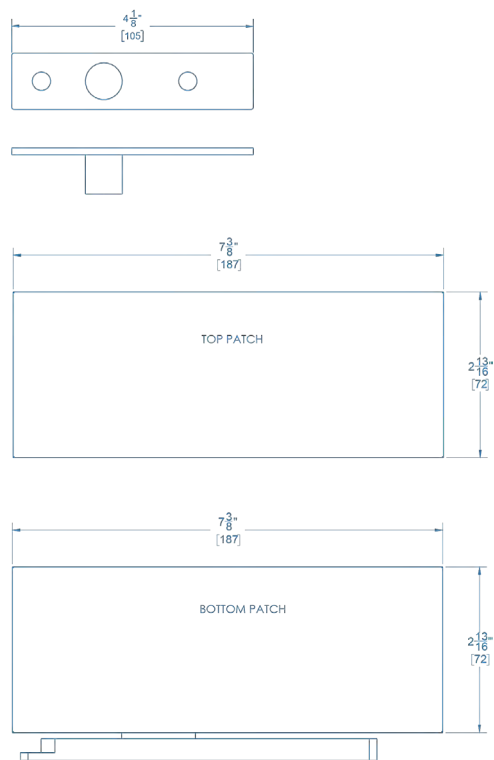

TOP LEAF HINGE CUTOUT

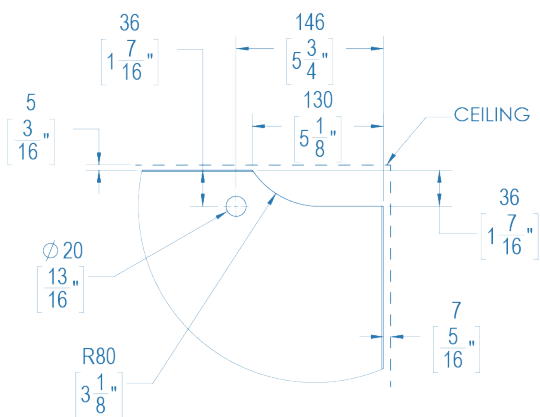

BOTTOM LEAF HINGE CUTOUT

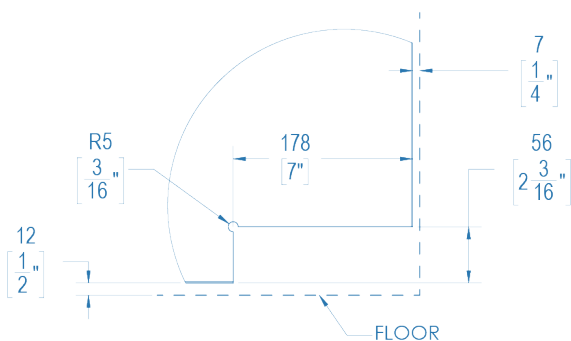

LEAF hydraulic pivot hinge

Compatible with:
3/8" (10 mm) and 1/2" (12 mm) glass

Door options \ Handle options	Pull handle	Cylindrical lockset	Mortise lockset
FG10/FG12 frameless glass door	✓		
S12 low profile glass door			
D52 acoustic asymmetric door			
D56 acoustic door			





Clear
anodized




Black finish

Glass cutout for FG10/FG12 frameless glass

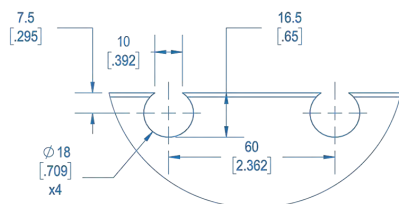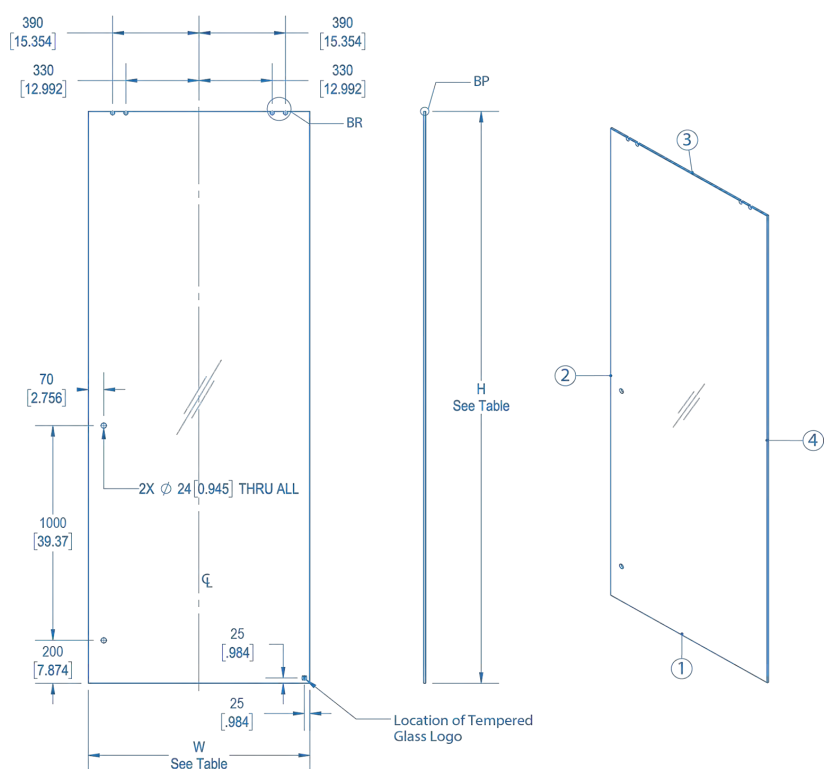

DETAIL BR
SCALE 1 : 2



Edges 1,2,3,4:
Chamfer 1.5mm x 45°
Polished

DETAIL BP
SCALE 1 : 2

INTEC


INTEC sliding track assembly

Load capacity:
Up to 80 kg (175 lb)

Integrated functions:
Soft-close

Door options \ Handle options	Pull handle	Cylindrical lockset	Mortise lockset
FG10/FG12 frameless glass door	✓		
S12 low profile glass door	✓		
D52 acoustic asymmetric door	✓		
D56 acoustic door	✓		



Complementary hardware:
Acoustic brush seal integrated into the door frame

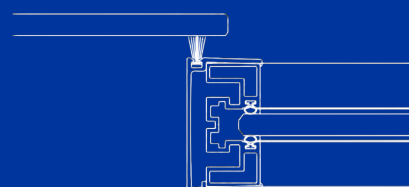





moodwall P1 & P3

Sliding track detail without adapter (left) and with adapter (right)

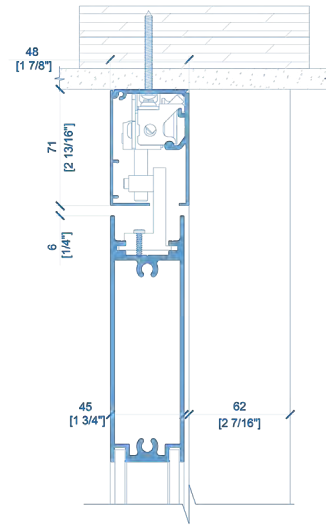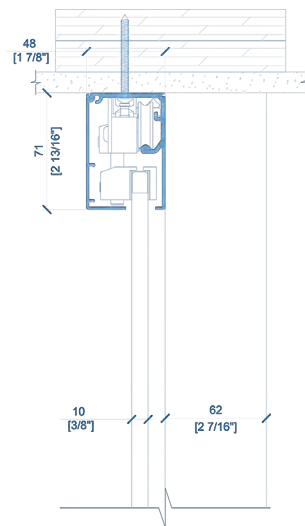

moodwall P4

Sliding track detail without adapter (left) and with adapter (right)

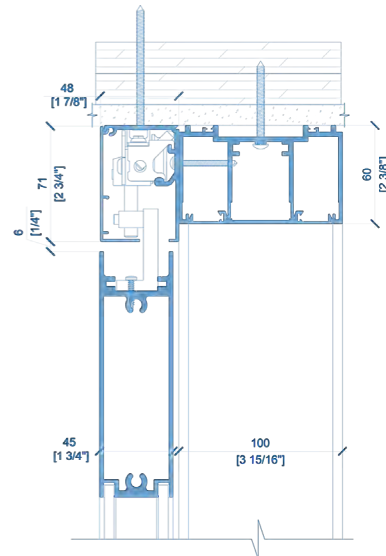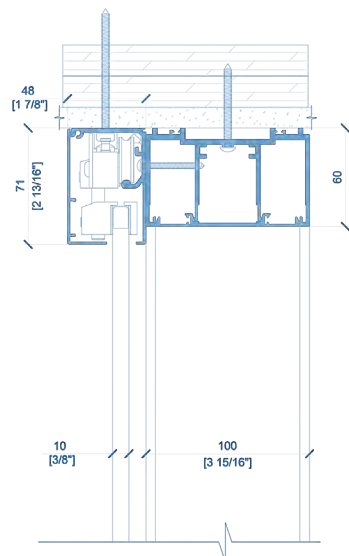



Stainless steel finish






Black finish

KERE-NL

KERE-NL pull handle

Door options	Hinge options	
	Regular hinge	Hydraulic hinge
FG10/FG12 frameless glass door		✓
S12 low profile glass door		✓
D52 acoustic asymmetric door		✓
D56 acoustic door		✓

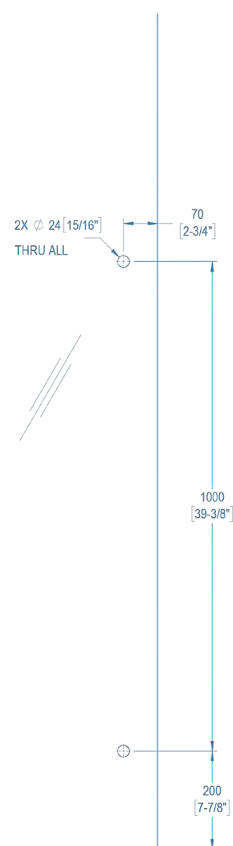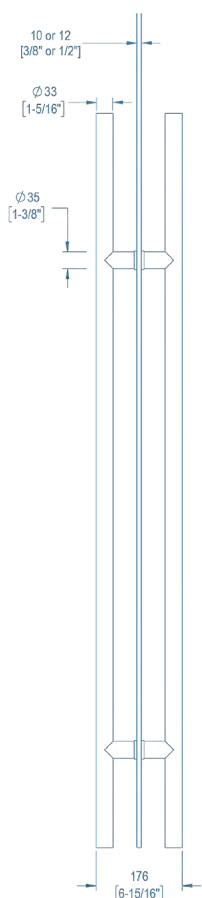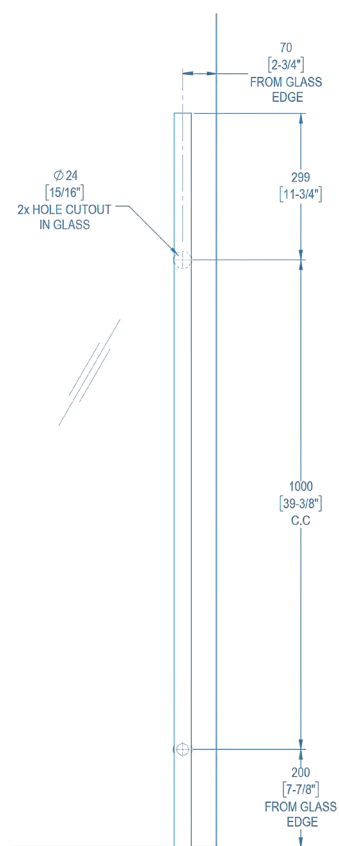

Complementary hardware:


Drop seal

Floor stop

KERE locking pull handle

Lock specifications:

7-pin SFIC lock engages bolt into floor
Interior thumbturn for single-motion egress

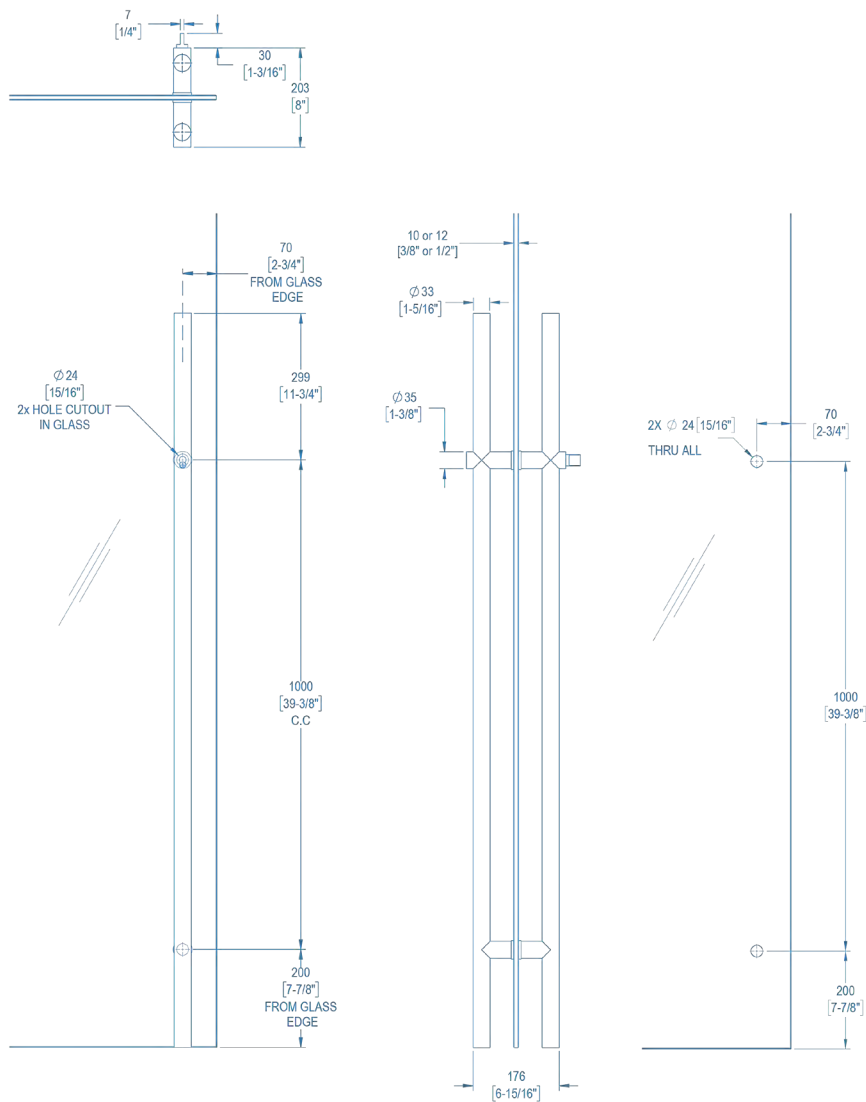

Door options	Hinge options	
	Regular hinge	Hydraulic hinge
FG10/FG12 frameless glass door		✓
S12 low profile glass door		✓
D52 acoustic asymmetric door		✓
D56 acoustic door		✓

Complementary hardware:

Drop seal


Floor stop

SEJO

cylindrical lockset

Satin chrome /
clear anodized

Black finish

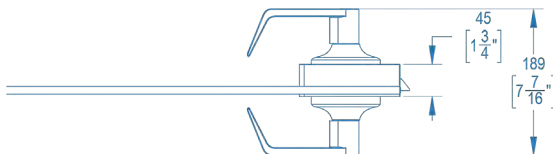



Lever handle return:
65 mm (2-5/8")

Lockset functions:

Passage function
Office function
Storeroom function
Other functions available upon demand

Security and accessibility standards:

Conforms to ANSI/BHMA A156.2 Series 4000, Operational and Security Grade 1
Meets ADA standards and ICC/ANSI A117.1 Accessibility Code

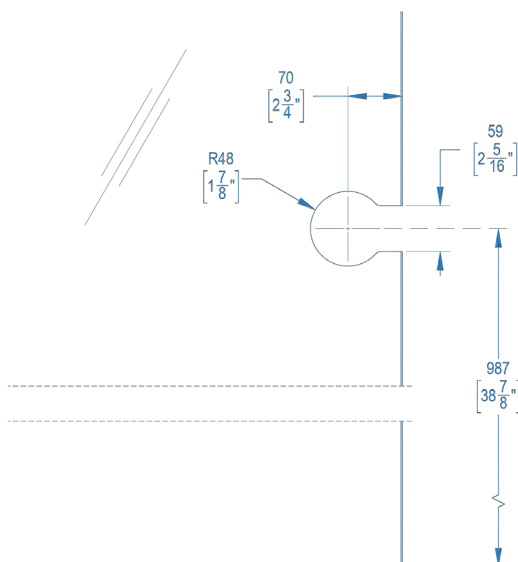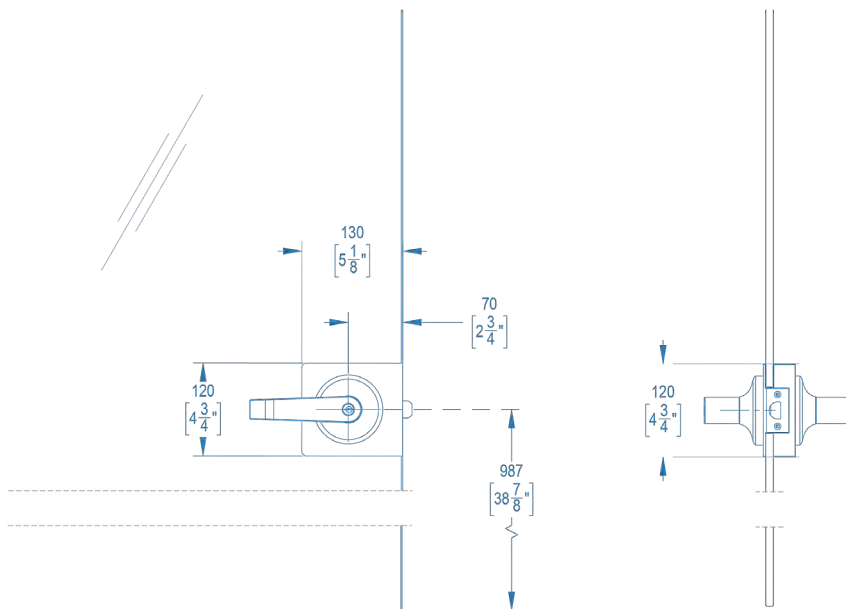

Door options	Hinge options	
	Regular hinge	Hydraulic hinge
FG10/FG12 frameless glass door	✓	✓
S12 low profile glass door		
D52 acoustic asymmetric door		
D56 acoustic door		




Complementary hardware:

Electric strike
Drop seal
Floor stop



Satin chrome /
clear anodized

Black finish

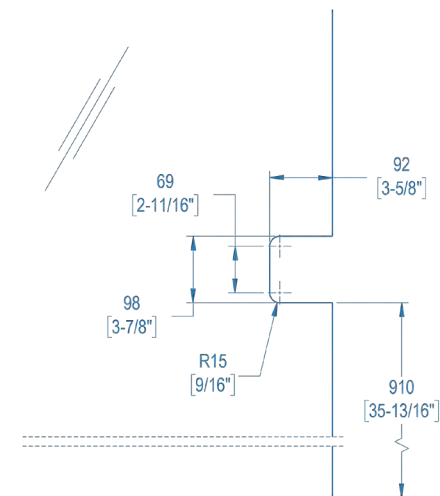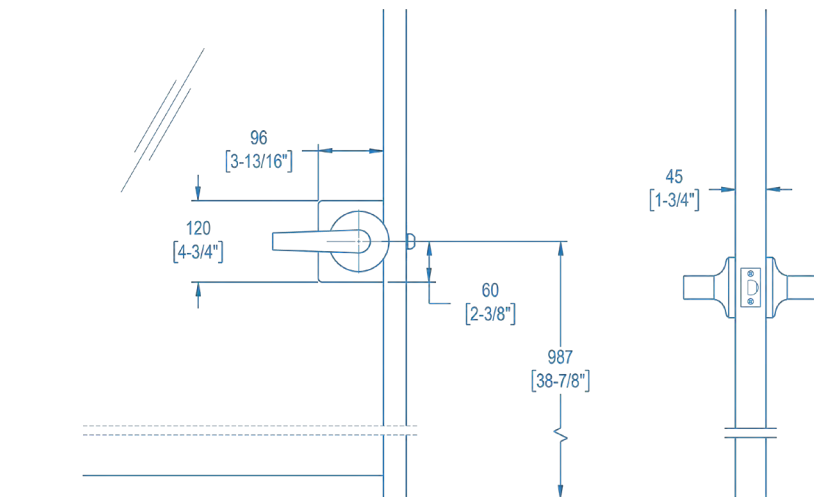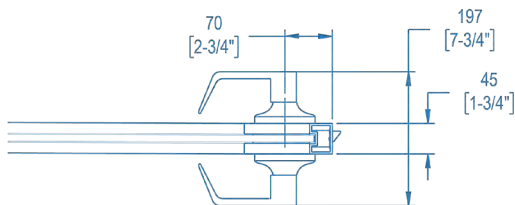

MARO

cylindrical lockset

Lever handle return:
65 mm (2-5/8")

Lockset functions:

Passage function
Office function
Storeroom function
Other functions available upon demand

Security and accessibility standards:

Conforms to ANSI/BHMA A156.2 Series 4000,
Operational and Security Grade 1
Meets ADA standards and ICC/ANSI A117.1
Accessibility Code

Hinge options	Regular hinge	Hydraulic hinge
Door options		
FG10/FG12 frameless glass door		
S12 low profile glass door	✓	✓
D52 acoustic asymmetric door		
D56 acoustic door		



Complementary hardware:

Electric strike
Drop seal
Floor stop



Satin chrome
finish

Black finish

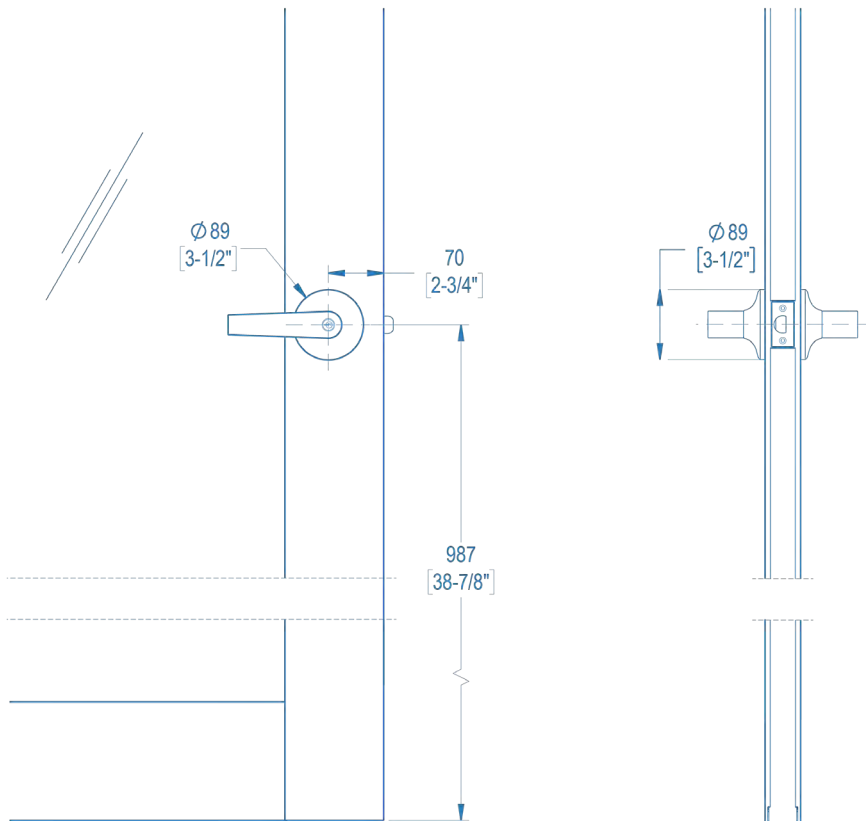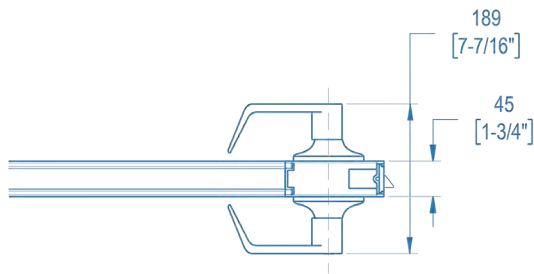

TERO

TERO cylindrical lockset

Lever handle return:
65 mm (2-5/8")

Lockset functions:
Passage function
Office function
Storeroom function
Other functions available upon demand

Security and accessibility standards:
Conforms to ANSI/BHMA A156.2 Series 4000, Operational and Security Grade 1
Meets ADA standards and ICC/ANSI A117.1 Accessibility Code

Door options	Hinge options	
	Regular hinge	Hydraulic hinge
FG10/FG12 frameless glass door		
S12 low profile glass door		
D52 acoustic asymmetric door	✓	✓
D56 acoustic door	✓	✓





Complementary hardware:
Electric strike
Drop seal
Floor stop



Satin chrome /
clear anodized



Black finish

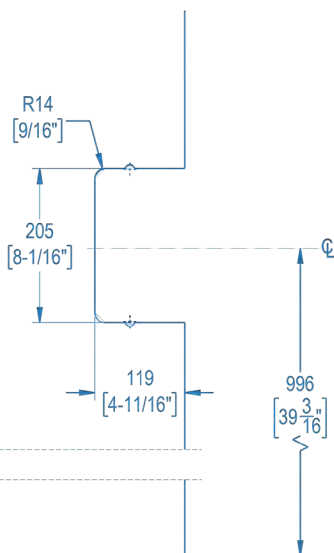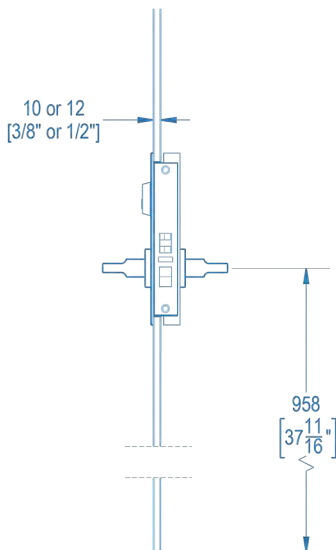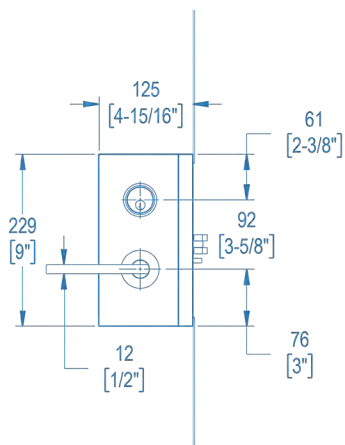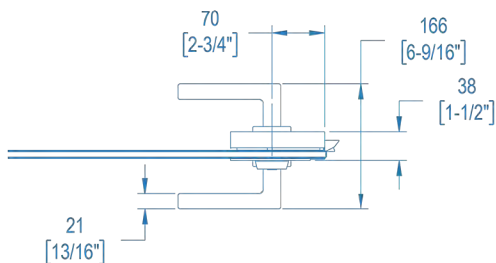

SERE mortise lockset

Lockset functions:

Passage function
Office function
Storeroom function
Other functions available upon demand

Security and accessibility standards:

Conforms to ANSI/BHMA A156.13 Series 1000, Operational and Security Grade 1
Meets ADA standards and ICC/ANSI A117.1 Accessibility Code

Hinge options	Regular hinge	Hydraulic hinge
Door options		
FG10/FG12 frameless glass door	✓	✓
S12 low profile glass door		
D52 acoustic asymmetric door		
D56 acoustic door		

Complementary hardware:





Electric strike
Drop seal
Floor stop



Satin chrome /
clear anodized



Black finish

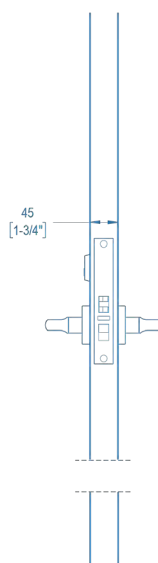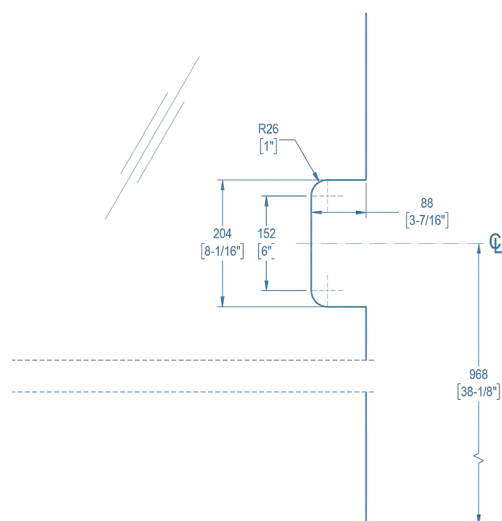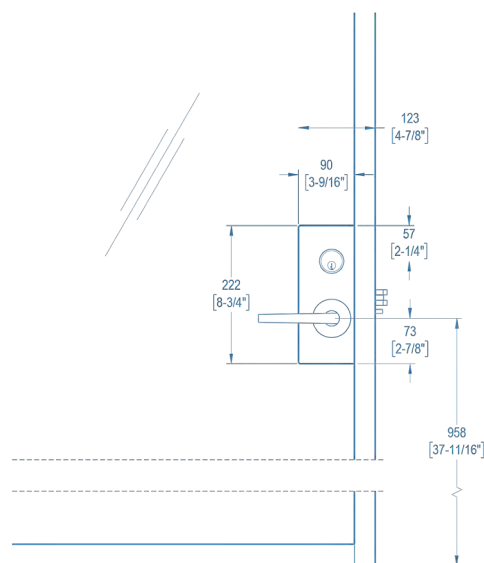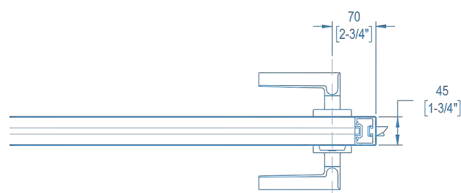

RESE

RESE mortise lockset

Lockset functions:

Passage function

Office function

Storeroom function

Other functions available upon demand

Security and accessibility standards:

Conforms to ANSI/BHMA A156.13 Series

1000, Operational and Security Grade 1

Meets ADA standards and ICC/ANSI

A117.1 Accessibility Code

Door options	Hinge options	
	Regular hinge	Hydraulic hinge
FG10/FG12 frameless glass door		
S12 low profile glass door	✓	✓
D52 acoustic asymmetric door		
D56 acoustic door		

Complementary hardware:

Electric strike

Drop seal




Floor stop



Satin chrome finish



Black finish

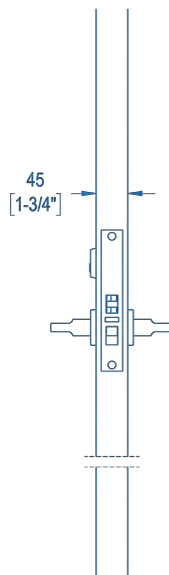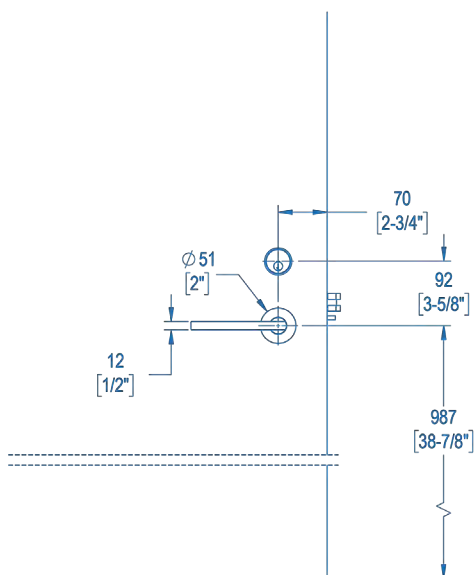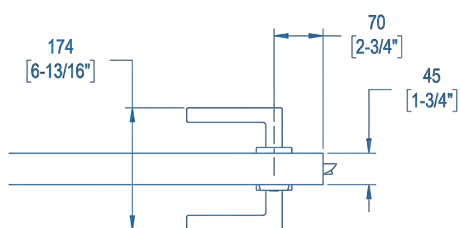

REVEL

REVEL mortise lockset

Lockset functions:

- Passage function
- Office function
- Storeroom function
- Other functions available upon demand

Security and accessibility standards:

- Conforms to ANSI/BHMA A156.13 Series 1000, Operational and Security Grade 1
- Meets ADA standards and ICC/ANSI A117.1 Accessibility Code

Door options	Hinge options	
	Regular hinge	Hydraulic hinge
FG10/FG12 frameless glass door		
S12 low profile glass door		
D52 acoustic asymmetric door	✓	✓
D56 acoustic door	✓	✓

Complementary hardware:


- Electric strike
- Drop seal
- Floor stop



Clear anodized
finish



Black finish

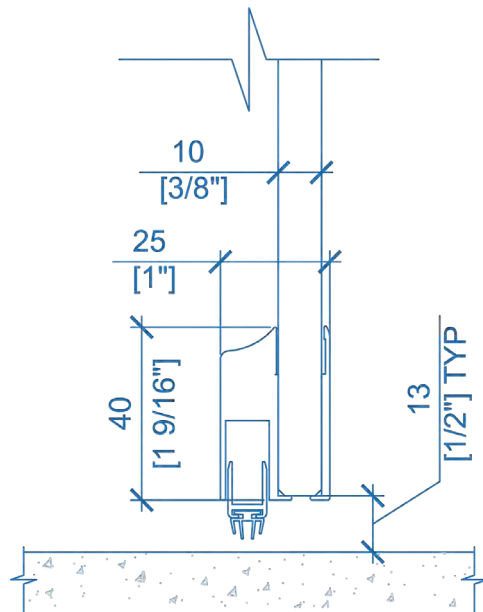

DS1

DS1 surface-mounted drop seal

Maximum width:
1219 mm (48"), field cut to size of door

Compatible doors:
FG10 and FG12 swing doors




Aluminum finish

DS2

DS2 mortise drop seal

Maximum width:
1219 mm (48"), cut to size and preinstalled in door

Compatible doors:
S12, D52, and D56 swing doors

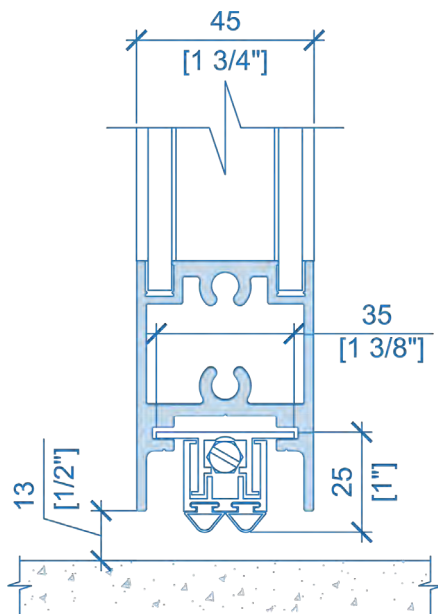




Clear anodized
finish



Black finish

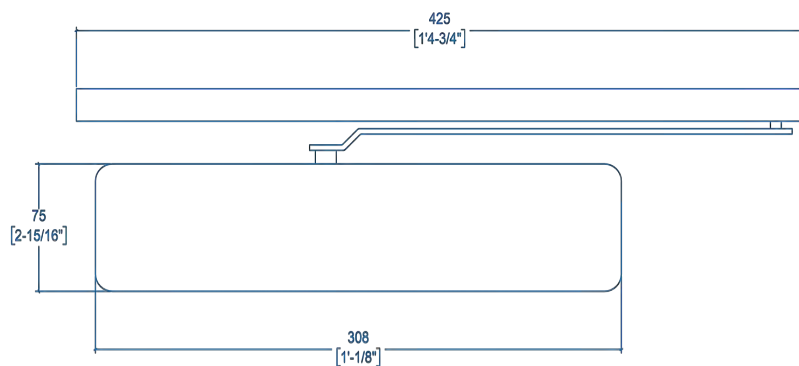

HDC surface-mounted door closer with parallel arm


Load capacity:
Up to 120 kg (265 lb)

Degree of opening:
100°

Integrated functions:
Parallel arm with hold-open at 90°



Standards:
Conforms to ANSI/BHMA A156.4 Grade 1

Compatible doors:
S12 swing door with mounting plate
D52 and D56 swing doors

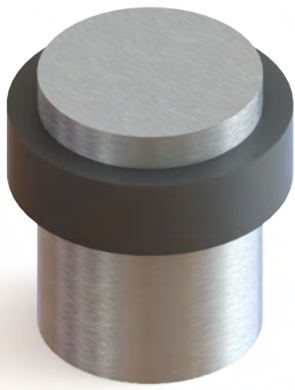

Stainless steel
finish

FS floor stop with rubber buffer

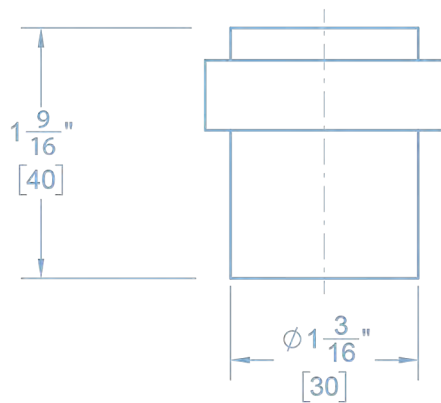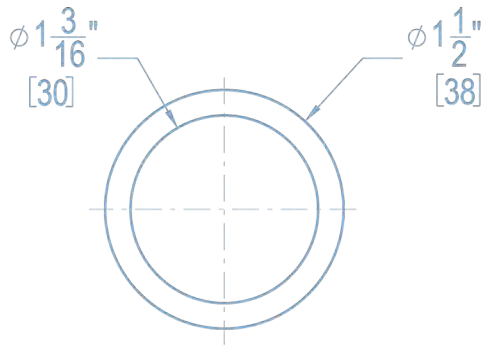

ES electric strike

General specifications:

Non-handed
Plug-in wire connectors and trim plate (included)

Adjustability:

Vertical adjustment up to 45 mm
Horizontal adjustment up to 6 mm (1/4")



Energy specifications:

Fail safe or fail secure (field-selectable)
375mA at 12VDC
(field-selectable) 12/24VDC or 12-24VAC

Holding strength:

Up to 680 kg (1500 lb)

Stainless steel finish

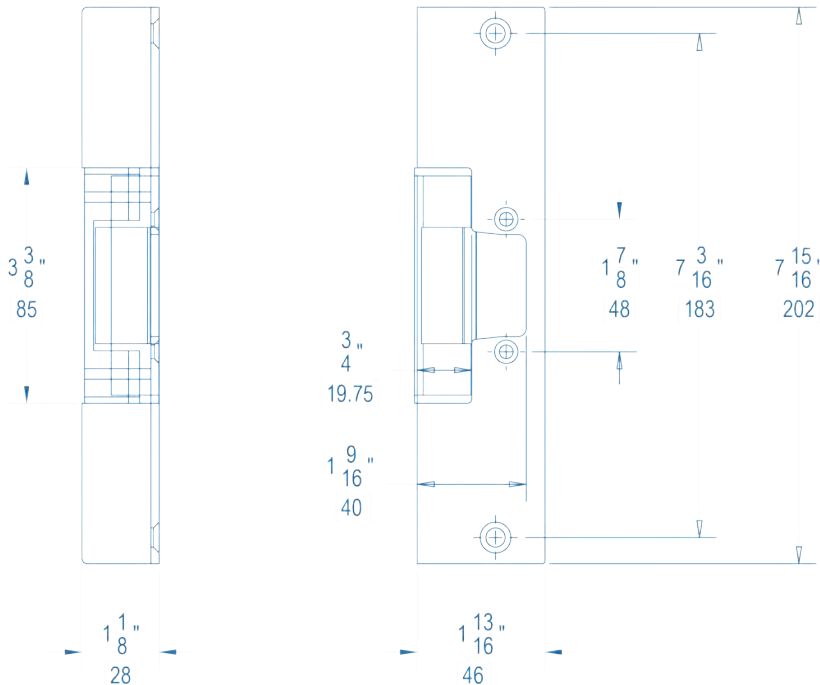

Door options	Handle options		
	Pull handle	Cylindrical lockset	Mortise lockset
FG10/FG12 frameless glass door		✓	✓
S12 low profile glass door		✓	✓
D52 acoustic asymmetric door		✓	✓
D56 acoustic door		✓	✓

EML electro-magnetic lock




Clear anodized finish

Energy specifications:

Fail-safe and unmonitored
Single magnet for single swing door:
500mA at 12VDC, 250mA at 24VDC
Double magnet for double swing door:
1000mA at 12VDC, 500mA at 24VDC

Holding strength:

Up to 544 kg (1200 lb)

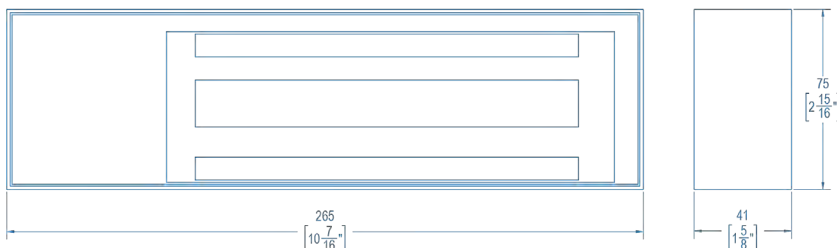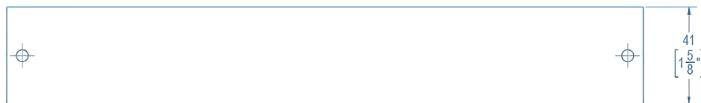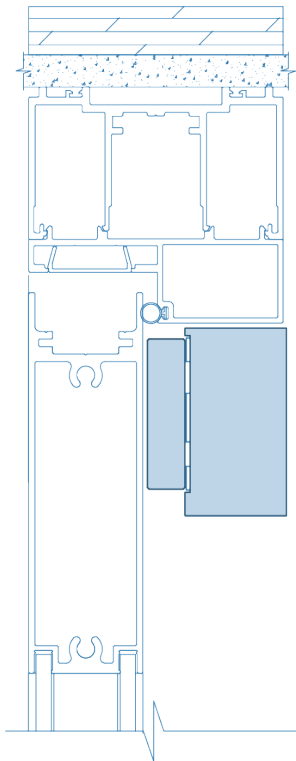

Door options	Handle options		
	Pull handle	Cylindrical lockset	Mortise lockset
FG10/FG12 frameless glass door			
S12 low profile glass door	✓	✓	✓
D52 acoustic asymmetric door	✓	✓	✓
D56 acoustic door	✓	✓	✓



rampart.ca | info@rampart.ca | 1.800.724.6600

25 rue d'Inverness, Suite 115, Candiac, Quebec, Canada, J5R 0W2